



HYDRAULIC / ELECTRIC
ECOFRIDGE SLIMLINE 12



SLIMLINE 12 IS A SLIM PROFILE SOLUTION designed to fit trucks with a low box. The unit is only 240 mm deep, thus making full use of the space between the box and cab.

Mounted externally on the front wall and equipped with our Display control system.

ECOFRIDGE

Slimline 12

- ▶ Hydraulic constant flow pump delivers full power regardless of speed
- ▶ Fuel savings of up to 60%
- ▶ Reduced CO₂, NO_x & PM emissions
- ▶ Lower service costs
- ▶ Mounted between the box and cab
- ▶ Mains connection 400 V
- ▶ Display control system

FUNCTION

SLIMLINE 12 IS POWERED BY A HYDRAULIC CONSTANT FLOW PUMP which is mounted directly on the truck's engine. This solution provides constant power whatever the engine speed.

The unit can be connected to the mains and is designed to be easy to service and maintain. Heat is provided by electric and water heaters.



Slimline 12 - slim, efficient and easy to maintain.


TECHNICAL SPECIFICATIONS

Model	Refrigeration capacity*		Electric power*		Standard heat	Extra heat Water	Multizone	Weight
	Box temp 0°C	Box temp -20°C	Box temp 0°C	Box temp -20°C				
Slimline 12	6,200 W	3,700 W	6,200 W	3,700 W	Yes	No	No	350 kg

*Refrigeration capacity specified at +30°C ambient temperature.

DIMENSIONS

Dimensions in mm

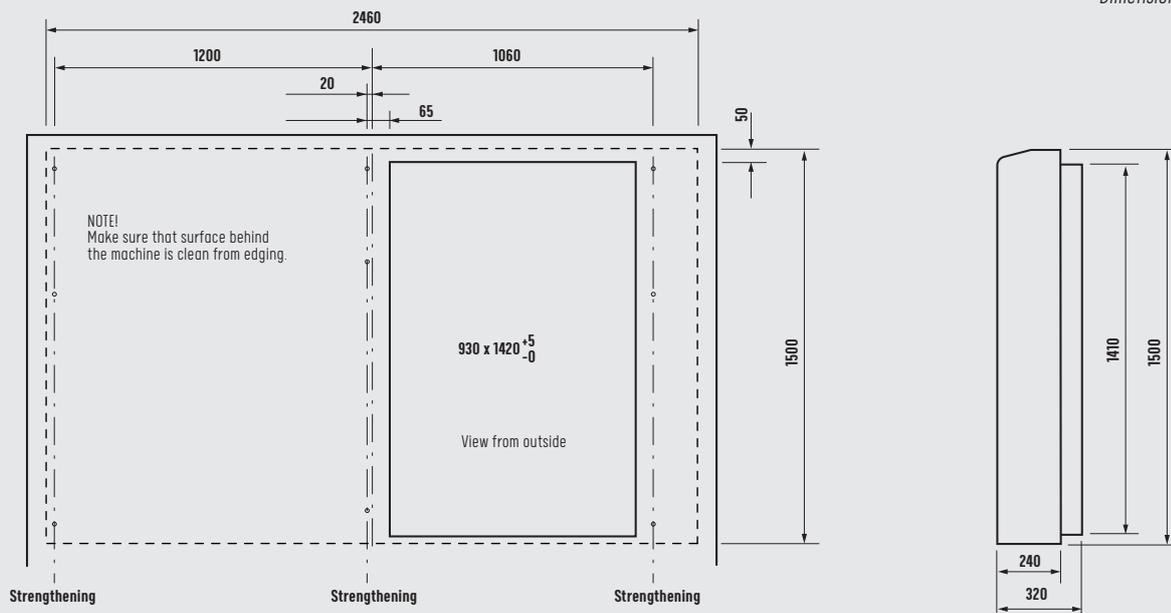

HULTSTEINS